



e-Lite

# Priority Queue

# Queuing, the smart way

# Queue

---

- ▶ First in, first out (FIFO)
- ▶ Easily implemented with a List
  - ▶ Also LIFO!



# Priority Queue

---

- ▶ Prioritization problems
- ▶ Canonical example: ER scheduling
  - ▶ A gunshot victim should probably get treatment sooner than that one guy with a sore neck, regardless of arrival time. How do we always choose the most urgent case when new patients continue to arrive?




# Poor choices

---

- ▶ **list**
  - ▶ remove max by searching is  $O(N)$
- ▶ **sorted list**
  - ▶ remove max is  $O(1)$ ; add (remove) is  $O(N)$
- ▶ **binary search tree**
  - ▶ remove max, add and remove are  $O(\log N)$
  - ▶ ... but tree may becomes unbalanced



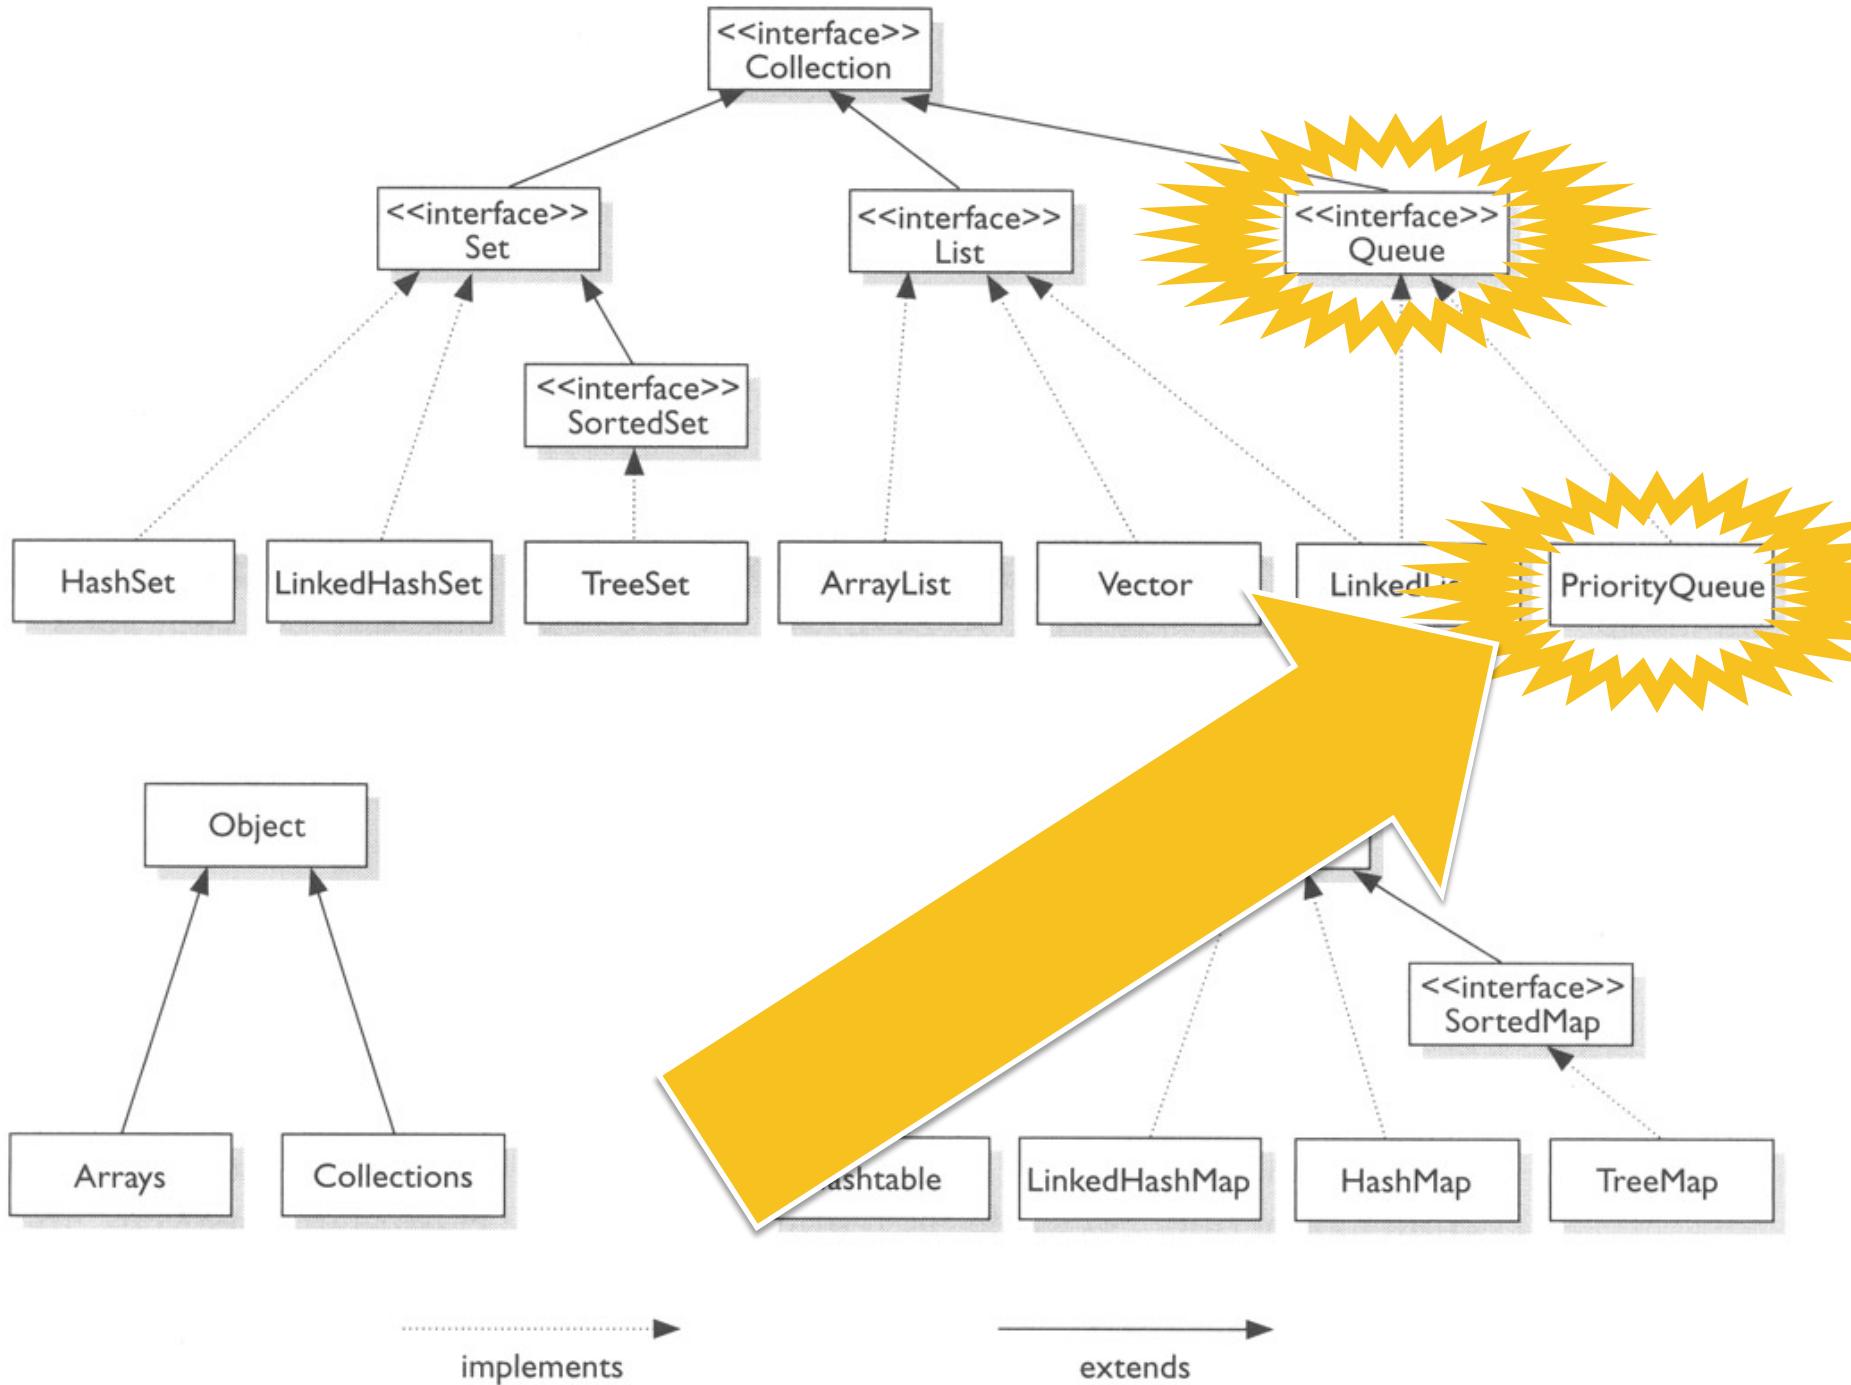

# Queue interface

---

- ▶ Add elements
  - ▶ boolean **add(element)**
  - ▶ boolean **offer(element)**
- ▶ Remove elements
  - ▶ element **remove()**
  - ▶ element **poll()**
- ▶ Examine
  - ▶ element **element()**
  - ▶ element **peek()**



# Queues

---

- ▶ Known implementing classes:

- ▶ `ArrayBlockingQueue`
- ▶ `ArrayDeque`
- ▶ `ConcurrentLinkedQueue`
- ▶ `DelayQueue`
- ▶ `LinkedBlockingDeque`
- ▶ `LinkedBlockingQueue`
- ▶ `LinkedList`
- ▶ `PriorityBlockingQueue`
- ▶ `PriorityQueue`
- ▶ `SynchronousQueue`

# Queues

- ▶ Known implementing classes:
  - ▶ **ArrayBlockingQueue**
  - ▶ **ArrayDeque**
  - ▶ **ConcurrentLinkedQueue**
  - ▶ **DelayQueue**
  - ▶ **LinkedBlockingDeque**
  - ▶ **LinkedBlockingQueue**
  - ▶ **LinkedList**
  - ▶ **PriorityBlockingQueue**
  - ▶ **PriorityQueue**
  - ▶ **SynchronousQueue**

Supports operations that wait for the queue to become non-empty when retrieving an element, and wait for space to become available in the queue when storing an element



# Queues

- ▶ Known implementing classes:

- ▶ **ArrayBlockingQueue**
- ▶ **ArrayDeque**
- ▶ **ConcurrentLinkedQueue**
- ▶ **DelayQueue**
- ▶ **LinkedBlockingDeque**
- ▶ **LinkedBlockingQueue**
- ▶ **LinkedList**
- ▶ **PriorityBlockingQueue**
- ▶ **PriorityQueue**
- ▶ **SynchronousQueue**

Double ended queues support insertion and removal at both ends. The name **deque** is short for “double ended queue” and is usually pronounced “deck”



# Queues

- ▶ Known implementing classes:
  - ▶ `ArrayBlockingQueue`
  - ▶ `ArrayDeque`
  - ▶ **ConcurrentLinkedQueue**
  - ▶ `DelayQueue`
  - ▶ `LinkedBlockingDeque`
  - ▶ `LinkedBlockingQueue`
  - ▶ `LinkedList`
  - ▶ `PriorityBlockingQueue`
  - ▶ `PriorityQueue`
  - ▶ `SynchronousQueue`

An unbounded thread-safe queue




# PriorityQueue

- ▶ An unbounded priority queue based on a priority heap.

<b>Method/Constructor</b>	<b>Description</b>	<b>Runtime</b>
<code>PriorityQueue&lt;E&gt;()</code>	constructs new empty queue	$O(1)$
<code>add(E value)</code>	adds value in sorted order	$O(\log N)$
<code>clear()</code>	removes all elements	$O(1)$
<code>iterator()</code>	returns iterator over elements	$O(1)$
<code>peek()</code>	returns minimum element	$O(1)$
<code>remove()</code>	removes/returns min element	$O(\log N)$
<code>size()</code>	number of elements in queue	$O(1)$

# What is a Heap?

- ▶ Kind of binary tree
- ▶ “Partially” ordered

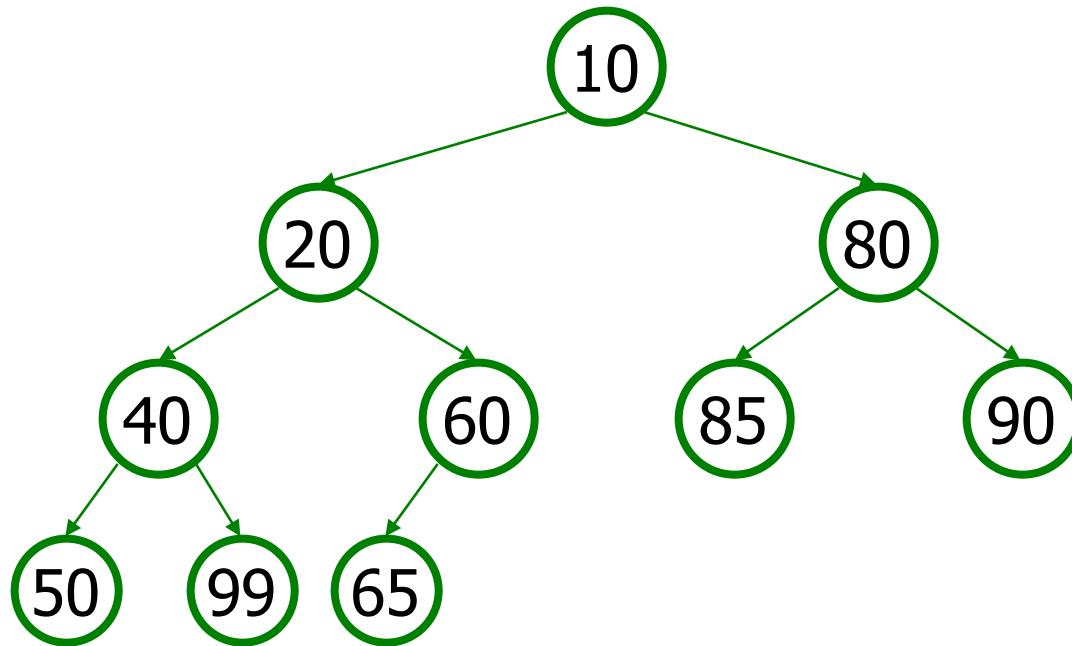

# Example

```
Queue<String> pq = new PriorityQueue<String>();  
pq.add("Homer");  
pq.add("Marge");  
pq.add("Bart");  
pq.add("Lisa");  
pq.add("Maggie");  
...
```



# Note

- ▶ For a priority queue to work, elements must have an ordering.
- ▶ Elements must implement the *Comparable* interface


```
public class Foo implements Comparable<Foo> {  
    ...  
    public int compareTo(Foo other) {  
        // Return positive, zero, or negative integer  
    }  
}
```


- ▶ The comparator must be specified in the constructor

```
public PriorityQueue(int initialCapacity,  
                    Comparator<? super E> comparator)
```

# Yet another possible use

- ▶ Dijkstra's original algorithm was  $O(V^2)$
- ▶ Exploiting a special priority queue is  $O(E + V \cdot \log V)$
- ▶ I.e., the fastest known single-source shortest-path algorithm for arbitrary directed graphs with unbounded non-negative weights

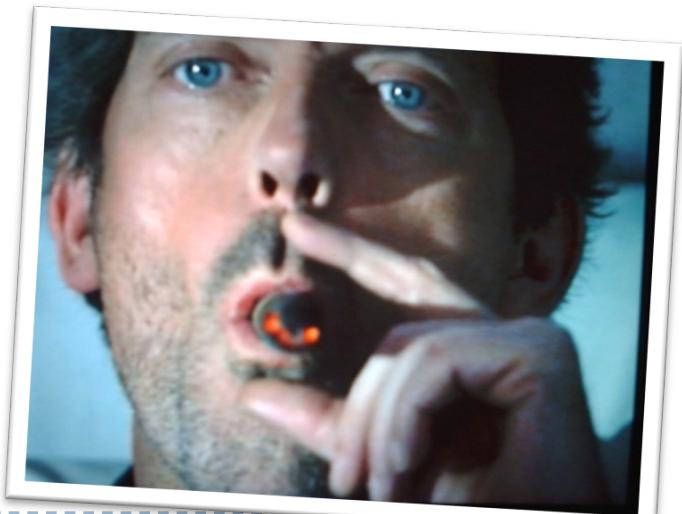

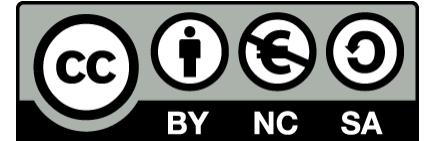

# Licenza d'uso

- ▶ Queste diapositive sono distribuite con licenza Creative Commons “Attribuzione - Non commerciale - Condividi allo stesso modo (CC BY-NC-SA)”
- ▶ Sei libero:
  - ▶ di riprodurre, distribuire, comunicare al pubblico, esporre in pubblico, rappresentare, eseguire e recitare quest'opera
  - ▶ di modificare quest'opera
- ▶ Alle seguenti condizioni:
  - ▶ **Attribuzione** — Devi attribuire la paternità dell'opera agli autori originali e in modo tale da non suggerire che essi avallino te o il modo in cui tu usi l'opera.
  - ▶ **Non commerciale** — Non puoi usare quest'opera per fini commerciali.
  - ▶ **Condividi allo stesso modo** — Se alteri o trasformi quest'opera, o se la usi per crearne un'altra, puoi distribuire l'opera risultante solo con una licenza identica o equivalente a questa.
- ▶ <http://creativecommons.org/licenses/by-nc-sa/3.0/>